


**Submittal Sheet**  
**#342-B L-Anchor with Two Slots**

**Custom Made:**

Used for attaching masonry to various backups.  
Specify length, width, bend length, steel type and slot configurations.

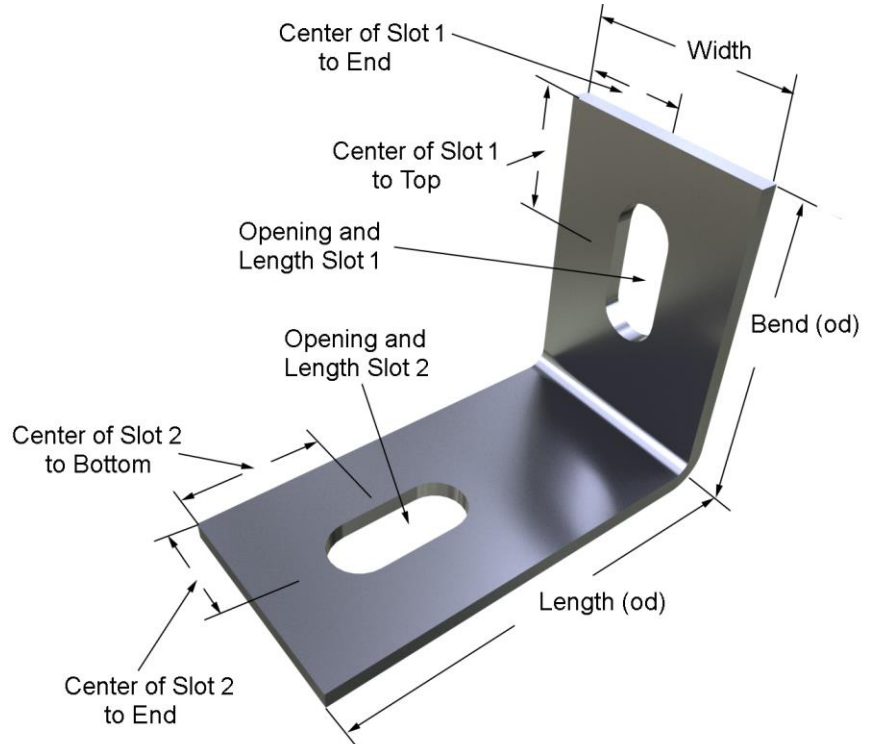

**Made to Order:**

Thickness:  3/8"  1/4"  3/16"  1/8"  
 12 gage  14 gage  16 gage

Length od: \_\_\_\_\_ Width: \_\_\_\_\_ Bend (od): \_\_\_\_\_

Slot 1 Opening : \_\_\_\_\_ Slot 1 Length: \_\_\_\_\_

Center of Slot 1 to Top: \_\_\_\_\_ Center of Slot 1 to End: \_\_\_\_\_

Slot 2 Opening : \_\_\_\_\_ Slot 2 Length: \_\_\_\_\_

Center of Slot 2 to Bottom: \_\_\_\_\_ Center of Slot 2 to End: \_\_\_\_\_

Finish:  Stainless type 304  Hot Dip Galvanized  
 Mill Galvanized  Zinc Alloy 710

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304 (AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>).(0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

**Firewall Anchors:** Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)